

FLOOR / BASE	EXISTING	WALL	CEILING
F1 EXISTING	W1 EXISTING		C1 EXISTING
F2 V.C. TILE / RUBBER	W2 PAINT EXISTING		C2 NEW ACQUIS TILES IN EXISTING CEILING GRID
F3 QUARRY TILE / QUARRY TILE	W3 PAINT EXISTING & PAINT NEW F.G. GYP. BD.		C3 SUSPENDED ACOUSTICAL CEILING
	W4 PAINT NEW F.G. GYP. BD.		C4 SUSPENDED GYP. BD. CEILING


NO.	ROOM NAME	FLOOR	WALL	CLG.	GLT.	SPECIAL REMARKS	NO.
RENOVATION OF EXISTING AREAS:							
G1	OFFICE	F1	W4	C1	EX.	* SEE ELEC. FOR COORD. OF EXISTING LIGHTING LAYOUT	
G2	CLOSET	F1	W3	C1	EX.	* SEE ELEC. - LIGHT FIXTURE	
G3	KITCHEN STORAGE	F3	W2	C4			
G4	KITCHEN	F3	W2	C4			
G5	DRY STORAGE	F3	W3	C4			
G6	JANITOR STORAGE	F2	W3	C3	8'-0"	* SEE MECH/ELEC. - HVAC AND LIGHT FIXTURES	
G7	PRE-TODDLER GLASSRM	F1	W4	C1			
G8	PRE-TODDLER TOILET	F1	W4	C1			
I00	HALL - CORRIDOR	F2	W3	C1		* ADD HANDSCOTING AND CORNER GUARDS	
I01	HOP SINK - CLOSET	F2	W3	C1	EX.	* SEE ELEC. - NEW LIGHT FIXTURE IN EXISTING CLG. GRID	
I02	TODDLERS	F2	W3	C1		* PAINT SOUTH WALL	
I03	LAUNDRY AREA	F2	W2	C3	EX.	* SEE MECH/ELEC. - HVAC AND LIGHT FIXTURES	
I04	STORAGE AREA	F2	W3	C3	EX.	* SEE MECH/ELEC. - HVAC AND LIGHT FIXTURES	
I05	STAFF BREAK ROOM	F2	W3	C1		* PAINT WEST WALL	
I06	CLASSROOM	F2	W3	C1	EX.	* SEE NOTE 3 REGARDING CEILING TILES	
I07	HALL - CORRIDOR	F2	W3	C1		* ADD HANDSCOTING AND CORNER GUARDS	
I08	CLASSROOM	F2	W3	C1			
I09	MULTI-PURPOSE RM	F2	W3	C3	EX.	* SEE MECH/ELEC. - HVAC AND LIGHT FIXTURES	
I10	CLASSROOM	F2	W3	C3	EX.	* SEE MECH/ELEC. - HVAC AND LIGHT FIXTURES	
I11	HALL - CORRIDOR	F2	W3	C1		* ADD HANDSCOTING AND CORNER GUARDS	
I12	TOILET	F2	W2	C1			
I13	TOILET - STAFF	F2	W2	C2	EX.		
I14 & I14.5	MAINTENANCE RM	F2	W2	C1			
I15	TODDLERS	F2	W3	C1			
I16	PRE-UTILITY ROOM		NO WORK IN THIS ROOM				

PLAN NOTES:

- CHASE WALL FOR DRYER VENT - 6" METAL STUDS. SEE PLUMBING, MECH AND ELECTRICAL FOR RELATED INFORMATION.
- REPAIR HALL WHERE BASE/HALL CABINETS HAVE BEEN REMOVED AND PREPARE WALL FOR FINISH / PAINTING.
- REPAIR THO AREAS OF GRID (2X4) TO ACCEPT 2X2 CEILING TILES. INSTALL 2X2 TILES FROM SALVAGED STOCK.
- DRY STORAGE ROOM & STORAGE ROOM CREATED FROM EXTERIOR ALCOVE SPACE - INCLUDE SECTION OF EXTERIOR WALL COMPOSITE/THERMAL ENVELOPE AS INDICATED ON TYPE A - WALL COMPOSITE.
- CLEAN UP FLOOR AT LOCATION OF DEMOLISHED WALL AND PREPARE/LEVEL FLOOR FOR FINISH / FLOORING.

DEMOLITION NOTES:

- PROTECT ALL MATERIALS AND FINISHES NOT SCHEDULED TO BE REMOVED OR REFINISHED.
- DEMOLITION INCLUDES ALL CONSTRUCTION DEMOLITION REQUIRED TO INSTALL ALL SCHEDULED OR DESCRIBED NEW WORK WHERE SPECIFICALLY NOTED ON THIS DEMOLITION PLAN OR NOT.
- NOTHING SHOWN ON THIS PLAN LIMITS THE CONTRACTOR'S REQUIREMENT TO PROTECT THE PUBLIC (STAFF & CHILDREN) FROM CONSTRUCTION DANGERS. CONTRACTOR MUST PROVIDE ALL NECESSARY CONSTRUCTION PROTECTION NECESSARY TO PROTECT THE PUBLIC, WHETHER SHOWN OR NOT.
- SEQUENCING OF DEMOLITION: BY CONTRACTOR. CDC WILL REMAIN OPEN AND FUNCTIONING DURING DEMO/RENO PROJECT. GC MUST INCLUDE AFTER HOURS (NIGHTS) AND WEEKEND WORKING HOURS.
- NOTE THAT DEMOLITION OF DOORS INCLUDES DEMO OF DOOR AND DOOR FRAME AND PATCH AND INFILL OF WALL AREA - FINISH PER ROOM FINISH SCHEDULE.
- CONFIRM EXISTING HALL IS NOT LOAD BEARING PRIOR TO DEMOLISHING NECESSARY AREA TO INSTALL NEW DOOR.
- ALL STORAGE CLOSET/CABINET "DOORS" TO BE DEMOLISHED AND REPLACED WITH NEW.
- DEMOLISH CEILING AND WALLS AS INDICATED (NOTE TO SALVAGE LIGHT FIXTURES FOR REINSTALLATION - TYPICAL)
- DEMOLISH COUNTER AND PREP AREA FOR NEW JANITOR'S CLOSET WITH HOP SINK - NEW WALLS TO EXTEND TO EXISTING CEILING - EXISTING CEILING GRID TO REMAIN.
- TYPICAL IN HALLWAYS - REMOVE CORNER GUARDS AND REMOVE EXISTING MASONITE HANDSCOTING - PREP WALL FOR NEW HANDSCOTING MATERIAL.
- CONCRETE SLAB HAS DROPPED AND CRACK HAS APPEARED ON EXTERIOR WALL. SEE ALLOWANCES FOR REPAIR FUNDING (HYDRAULIC CONCRETE).
- DEMOLISH WINDOW UNIT AND INFILL OPENING WITH EXTERIOR WALL COMPOSITE. NEW WINDOW UNIT (REDUCED OPS) TO BE FIELD MEASURED -
- DEMOLISH EXTERIOR WALL AND DOOR. DEMOLISH EXTERIOR WALL FINISH AND EXTERIOR CEILING, SOFFIT, ETC. PREP FOR EXTENSION OF BUILDING AREA - UNDER EXISTING ROOF AREA.
- PROTECT EXISTING COLUMN IN DEMOLISHED WALL - COLUMN TO REMAIN.
- DEMOLISH CONCRETE SIDEWALK AND PREP AREA FOR NEW 4" CONC FLOOR SLAB WITH VAPOR BARRIER.

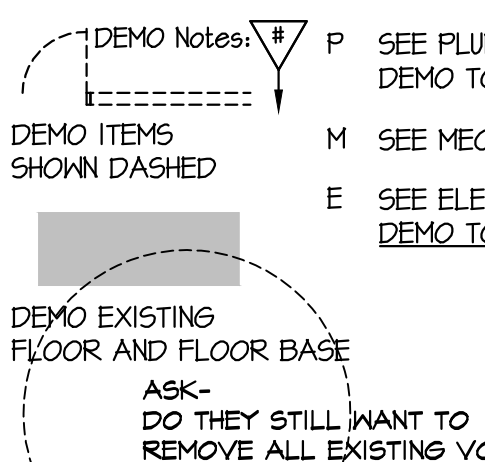

REFERENCE P, M AND E DRAWINGS FOR RELATED DEMO NOTES

**ALTERNATE #3
CDC
RENOVATION**

Existing/Demo Plans
Demolition Notes
Renovation Floor Plan
Renovation Notes

**St John's
Lutheran
Church
2020 RENOVATIONS**

